




SSCFUS2ADB THRU SSCFUS2MDB

2.0Amp Ultra Fast Recovery Surface Mounted Rectifiers

● Features

- ✧ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ✧ Construction utilizes void-free molded plastic technique
- ✧ Low reverse leakage
- ✧ High forward surge current capability
- ✧ High temperature soldering guaranteed 260°C/10 seconds at terminals

● PIN configuration



SMB/DO-214AA



Circuit Diagram

● Mechanical Data

- ✧ Case: Molded plastic body
- ✧ Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- ✧ Polarity: Polarity symbol marking on body
- ✧ Mounting Position: Any



Marking

(US2D: SSCFUS2DDB Marking Code)

● Absolute Maximum Rating @T_A=25°C

Parameter	Symbol	SSCFUS2							Unit
		ADB	BDB	DDB	GDB	JDB	KDB	MDB	
Maximum Peak Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current	I _{F(AV)}	2.0							A
Non-repetitive Peak Forward Surge Current @t=8.3ms	I _{FSM}	50.0							A
Max Instantaneous Forward Voltage at 1.0A	V _F	1.0		1.4	1.7			V	
Maximum DC Reverse Current Ta = 25 °C at Rated DC Blocking Voltage Ta =100 °C	I _R	5.0			500				µA
Maximum Reverse Recovery Time (Note 1)	T _{rr}	50				75			ns
Typical Junction Capacitance (Note 2)	C _J	50.0							pF
Typical Thermal Resistance	R _{qJA}	85.0							°C/W
Operating Temperature and Storage Temperature	T _J , T _{STG}	-55 ~ +150							°C

Note: 1. Reverse recovery time test condition: IF=0.5A IR=1.0A Irr=0.25A

2. Measured at 1MHz and applied reverse voltage of 4.0V DC.



● Typical Performance Characteristics

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

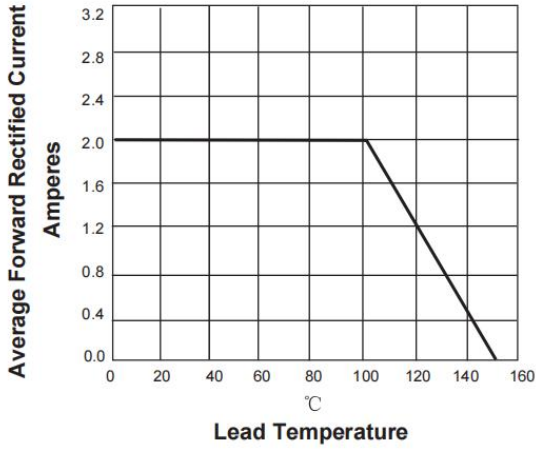


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

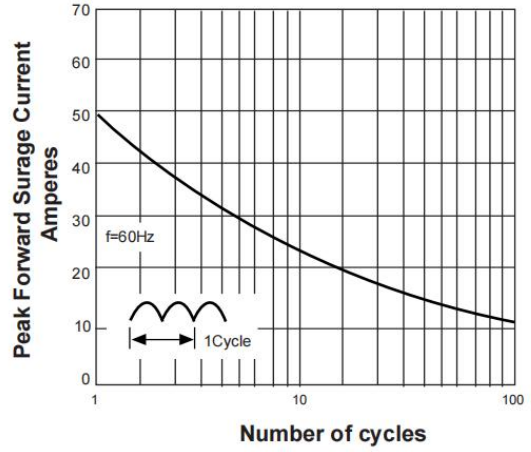


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS


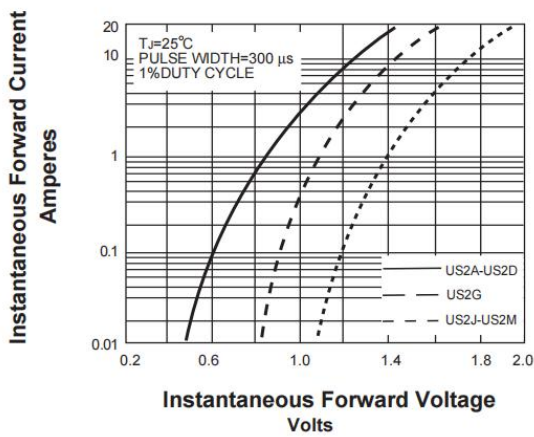


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS



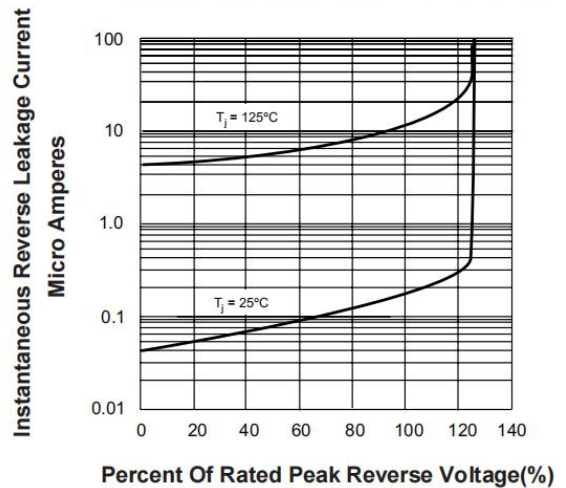

● Package Information


Ordering Information

Device	Package	Marking	Qty per Reel	Reel Size
SSCFUS2ADB	SMB/DO-214AA	US2A	3000	13 Inch
SSCFUS2BDB	SMB/DO-214AA	US2B	3000	13 Inch
SSCFUS2DDB	SMB/DO-214AA	US2D	3000	13 Inch
SSCFUS2GDB	SMB/DO-214AA	US2G	3000	13 Inch
SSCFUS2JDB	SMB/DO-214AA	US2J	3000	13 Inch
SSCFUS2KDB	SMB/DO-214AA	US2K	3000	13 Inch
SSCFUS2MDB	SMB/DO-214AA	US2M	3000	13 Inch

Mechanical Data


Case: SMB/DO-214AA

Case Material: Molded Plastic. UL Flammability

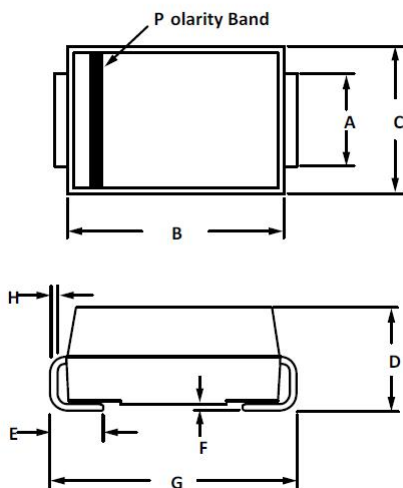

DIM	Millimeters	
	Min	Max
A	1.90	2.1
B	4.22	4.70
C	3.40	3.94
D	2.00	2.50
E	0.90	1.42
F	0.00	0.23
G	5.21	5.59
H	0.15	0.31

Recommended Pad outline (Unit: mm)

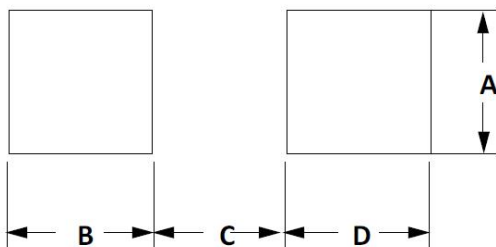

DIM	Millimeters	
	Min	Max
A	2.15	-
B	1.45	-
C	-	2.55
D	1.45	-



DISCLAIMER

SSCSEMI RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. SSCSEMI DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICIENCE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

THE GRAPHS PROVIDED IN THIS DOCUMENT ARE STATISTICAL SUMMARIES BASED ON A LIMITED NUMBER OF SAMPLES AND ARE PROVIDED FOR INFORMATIONAL PURPOSE ONLY. THE PERFORMANCE CHARACTERISTICS LISTED IN THEM ARE NOT TESTED OR GUARANTEED. IN SOME GRAPHS, THE DATA PRESENTED MAY BE OUTSIDE THE SPECIFIED OPERATING RANGE (E.G. OUTSIDE SPECIFIED POWER SUPPLY RANGE) AND THEREFORE OUTSIDE THE WARRANTED RANGE.

OUR PRODUCT SPECIFICATIONS ARE ONLY VALID IF OBTAINED THROUGH THE COMPANY'S OFFICIAL WEBSITE, CRM SYSTEM, OR OUR SALES PERSONNEL CHANNELS. IF CHANGES OR SPECIAL VERSIONS ARE INVOLVED, THEY MUST BE STAMPED WITH A QUALITY SEAL AND MARKED WITH A SPECIAL VERSION NUMBER TO BE VALID.